

POS-X

Last Modified on 11/14/2024 1:05 pm CST

[POS-X Cash Drawer Installation](#) | [POS-X Ion Tablet Configuration Reset](#)

POS-X Cash Drawer Installation

The following installation instructions have been made available for districts who use POS-X cash drawers.

Campus does NOT support POS-X cash drawers on the POSReady 2009 operating system.


See the [Point of Sale Terminal Minimums](#) for more information about supported platforms.

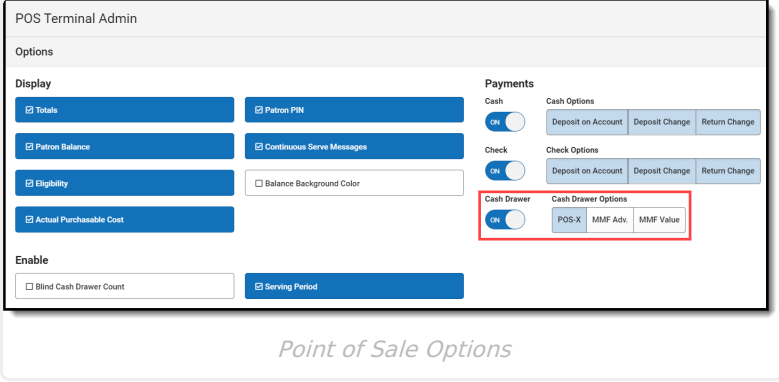
Windows 11 Support

If you are using Windows 11 and a POS-X Cash Drawer, the following adapter must be used:

- P/N: 977GF010000005
- Description: USB CASH DRAWER ADAPTER GEN2

Download and install this driver to finalize the adapter installation process: https://px-download.s3.us-east-1.amazonaws.com/Apex_USB_Cash_Drawer_VCOM_Driver.exe

Step	Description	Notes
1	<p>Use the Install Terminal option on the Terminals tool in Campus to download and install the POS terminal software. After the POS terminal software is installed and the terminal has rebooted, click the  Campus Point of Sale shortcut, log into the POS application with the Admin PIN, and load POS data.</p> <p>Never uninstall the Campus POS application without first contacting Support.</p>	<p>See the article Terminal Installation and Configuration for complete instructions.</p> <p>PATH: Point of Sale > Administration > Terminals</p>

Step	Description	Notes
2	<p>Set Point of Sale Options. When setting Point of Sale Options, select POS-X in the Cash Drawer Options.</p>  <p>The screenshot shows the 'POS Terminal Admin' interface. Under the 'Options' section, there are several categories: 'Display' (Totals, Patron PIN, Patron Balance, Continuous Serve Messages, Eligibility, Actual Purchasable Cost), 'Payments' (Cash, Check, Cash Drawer), and 'Enable' (Blind Cash Drawer Count, Serving Period). The 'Cash Drawer' section is highlighted with a red box, showing 'Cash Drawer Options' set to 'POS-X'.</p> <p style="text-align: center;"><i>Point of Sale Options</i></p>	<p>See the article Terminal Installation and Configuration for complete instructions. After setting Point of Sale Options, the POS-X cash drawer is ready for use.</p>

POS-X Ion Tablet Configuration Reset

The scanner on the POS-X Ion Tablet immediately works with Campus Point of Sale without additional configuration. However, if the configuration is manually changed and no longer works with Campus, you can use the following steps to reset the configuration.

1. Download the scanner configuration guide found here: <https://pos-x.com/download/ion-tablet-scanner-configuration-guide/>
2. Scan the following barcodes in the order listed below:
 - **Restore Defaults** (Header 6-5, page 12)
 - **USB HID Keyboard** (Header 8-5, page 67)
 - **Carriage Return** (Header 6-29, page 36)