

SIRS Attendance Code (New York)


Last Modified on 05/31/2024 10:03 am CDT

Best Practices | Report Logic | Extract Editor Field Descriptions | Attendance Code Extract Layout

Tool Search: SIRS Extracts

The Attendance Code reports a list of attendance codes that exist at the school level for labeling a student's attendance record.



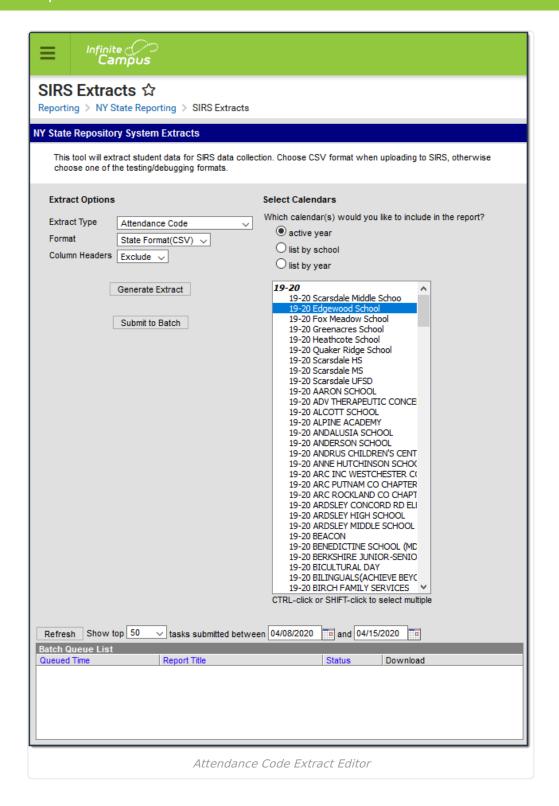

Best Practices

For a normal suspension code that excludes a student from class for the day without excluding them from the BEDS/SAMS report, set up the local code with a Status/Excuse of Absent/Exempt. This affects the student's instructional time in Staff Student Course while not counting as an absence on Student Daily Attendance or SAMS/BEDS.

Separate codes ought to be set up with the appropriate Status/Excuse for students who are absent



or tardy when serving a suspension to correctly capture the data across the various reports that consider attendance.

Report Logic

One record reports all Attendance Codes in System Administration > Attendance > Attendance Codes.

When multiple calendars are selected within the extract editor, the respective output files report sequentially so that identical codes like *Snow Day* report separately for each institution.

Extract Editor Field Descriptions

Field	Description	
Extract Type	The SIRS Extract to be run.	
Format	The Format in which the report generates. Options are State Format (CSV) and HTML. Use State Format for reporting information to the state and the other types for data review and verification.	
Column Headers	Indicates whether Column Headers should be included in the report. This dropdown list applies to State Format (CSV).	
Generate Extract/ Submit to Batch	Users have the option of submitting a report request to the batch queue by clicking Submit to Batch instead of immediately generating the report by clicking Generate Extract . The batch process allows larger reports to generate in the background without disrupting the use of Campus. For more information about submitting a report to the batch queue, see the Batch Queue article.	
Select Calendars	Identifies which Calendar(s) should be included in the report. Calendars can be sorted by active year, by school or by year.	

Attendance Code Extract Layout

#	Element	Logic	Location
1	DISTRICT	The identification number of the district. The prefix NY is added to the district number. For example, when the district number is 662001, the District Code is NY662001. Numeric, 8 digits	System Administration > Resources > District Information > District Number District.number
2	ATT CODE	This field reports blank.	N/A



#	Element	Logic	Location
3	ATT DESC	A description of the attendance code. Reports the local attendance code description value. Otherwise, the code value reports. Alphanumeric, 100 characters	System Administration > Custom > Attribute/Dictionary > AttendanceExcuse > State Code > Dictionary > Name AttendanceExcuse.stateCode
		Tupriamene, 100 enaracters	System Administration > Attendance > Attendance Codes > AttendanceExcuses Editor > AttendanceExcuse Detail > Description AttendanceExcuse.description
4	ATT CATEGORY	This field reports blank.	N/A
5	ATT CODE LONG	The local attendance PRSNT code. Reports the local attendance code value.	System Administration > Attendance > Attendance Codes > AttendanceExcuses Editor > AttendanceExcuse Detail > Code AttendanceExcuse.code
6	ATT TYPE	Alphanumeric, 25 characters	N/A
	SORT	This field reports blank.	
7	SEQUENCE	This field reports blank.	N/A
8	ATT STATUS	This field reports blank.	N/A
9	STATE ATT CODE	The State Attendance PRSNT Code used to indicate the type of absence, tardy, or suspension for state-reportable codes. The value in this field is calculated based on the attendance codes set up in System Administration > Attendance > Attendance Codes > AttendanceExcuses Editor > AttendanceExcuse Detail > Status/Excuse OR State Code. Suspension records report their State Code: ISS	System Administration > Custom > Attribute/Dictionary > AttendanceExcuse > State Code > Dictionary > Code AttendanceExcuse.stateCode AttendanceExcuse.status AttendanceExcuse.excuse



#	Element	Logic	Location
		State-reportable absence and tardy records report based on the following Status/Excuse combinations: • Absent/Unknown, U reports. • Absent/Excused, E report. • Absent/Unexcused, U reports. • Tardy/Unknown, T-IN reports. • Tardy/Excused, T-IN reports. • Tardy/Unexcused, T-IN reports. • Present/any excuse, PRSNT-IN reports.	
		The following attendance codes report as PRSNT-OUT: • ENS (Enrolled Not Scheduled) • P-OIN (Present Out of School, Modality In-Person) • P-OR (Present Out of School, Modality Remote) • P-OUT When the state code is P-IN, PRSNT-	
		IN reports.	
		When the state code is P-OSN, OSS reports.	
		Non-state-reportable attendance codes report blank.	
		Alphanumeric, 16 characters	



#	Element	Logic	Location
10	STATE ATT DESC	The State Attendance Code Description for the code reported in the STATE ATT CODE column. When State Attendance Code is: E, Excused reports. U, Unexcused reports. T-IN, Tardy in School reports. T-OUT, Tardy Out of School reports. ISS, In-School Suspension reports. OSS, Out-of-School Suspension reports. PRSNT-IN, Present In School reports. PRSNT-OUT, Present Out of School reports. Non-state-reportable attendance codes report blank.	Not dynamically stored
11	SCHOOL YEAR	This field always reports as "June 30" of the reported school year. Date field, 10 characters YYYY-06-30	System Administration > Calendar > School Year Calendar.endDate
12	ATT CODE TYPE	This field always reports STUDENT . <i>Alphanumeric, 15 characters</i>	Not dynamically stored
13	ATTENDANCE SHORT DESCRIPTION	This field reports blank.	N/A

Previous Versions

SIRS Attendance Code (New York) [.2219 - .2251]